

# KFL-10


## Visual Fault Locator



### Key Features

- Bright red laser at 650nm
- Pulsed and CW operation
- Outpower: 1mw,10mw,20mw,30mw
- 2.5mm universal connector
- 40 hours of operation(1mW)
- Pocket size design
- 1.25 mm adapter for LC (optional)

Time saving and high efficiency

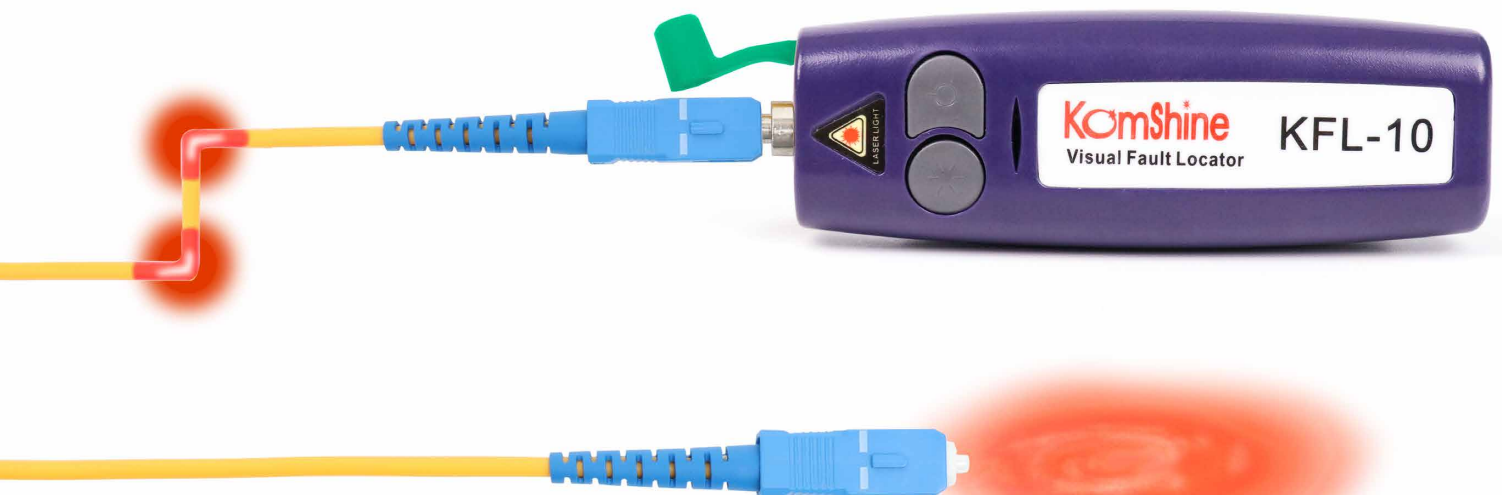

# Support four interface fiber types



**ST**



**FC**



**SC**



**LC (optional)**

## PRODUCT SPECIFICATION:

Model	KFL-10-1	KFL-10-10	KFL-10-20	KFL-10-30
Power range	1mW (default)	10mW	20mW	30mW
Test distance	About 3-5km	About 10km	About 15km	About 20km
Working hours	40H	20H	15H	8H
Output Wavelength	650nm			
Laser type	FP-LD			
2Hz	Yes			
Connector type	2.5mm universal connector for FC,SC,ST;1.25mm LC optional			
Operating Temperature	-10°C~60°C			
Storage Temperature	-20°C~70°C			
Battery	AAA*2 (Purchased separately)			
Without battery	40g			
Dimensions	120*35*20mm			

## HEAD OFFICE

KomShine Technologies Limited

## CONTACT US

Add: 2F Bldg. D Qinheng Tech. Pk. Nanjing, JS, 210001, China

TEL: +86 ( 025 ) 66047688

[www.komshine.com](http://www.komshine.com)

[ventas@komshine.com](mailto:ventas@komshine.com)

\* Komshine reserves the right to improve, enhance, or modify the features and specifications of KomShine products without prior notification.

\*Company and product names appearing in this catalogue are registered marks or trademarks of respective companies.

\* This catalogue is printed using environmentally friendly paper and ink.