



KFL-11P

Visual Fault Locator (Pen type)



Key Features

- Bright red laser at 650nm
- Pulsed and CW operation
- Outpower: 1mw,10mw,20mw,30mw
- 2.5mm universal connector
- 30 hours of operation(1mW)
- Pocket size design
- 1.25 mm adapter for LC (optional)

Support all fiber optic connectors










ST FC SC LC (optional)

PRODUCT SPECIFICATION:

Model	KFL-11P
output power	1mW 10mW 20mW 30mW
Output wavelength	650nm
Laser type	FP-LD
2Hz	Yes
Connector type	2.5mm universal for FC,SC,ST
working temperature	-20~50°C
Storage temperature	-20~50°C
Battery	AA*2 (Purchased separately)
weight	80g
Shape size	180*24mm

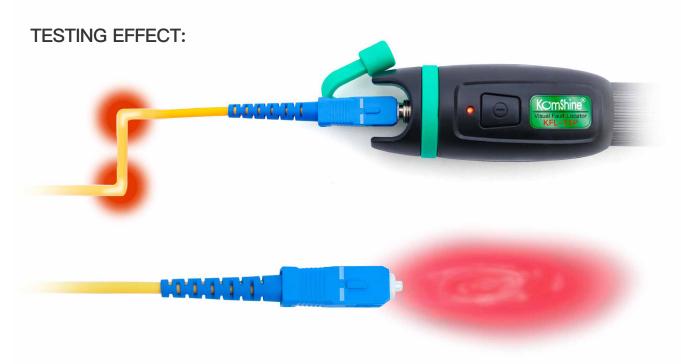

STANDARD PACKAGE:





HEAD OFFICE

KomShine Technologies Limited

CONTACT US

Add: 2F Bldg. D Qinheng Tech. Pk. Nanjing, JS, 210001, China

TEL: +86 (025) 66047688

www.komshine.com

ventas@komshine.com

* Komshine reserves the right to improve, enhance, or modify the features and specificactions of KomShine products without prior notification.

*Company and product names appearing in this catalogue are resisterd marks or trademarks of respective companies.

* This catalogue is printed using environmentally friendly paper and ink.