


QX70

All-in-1 All Fiber OTDR




Large Screen
7 inch GUI



Dead Zone
0.5m



High Dynamic
Range Up to 42dB



Built-in
OPM & VLS



ALL-in-1
850~1625nm

Support four interface fiber types



ST



FC



SC



LC

GUI interface

GUI interface design, operation is more simple, more intuitive reflection of the measurement results.



Color touch screen

Touch and key make operation more varied. To satisfy different people's habits and improve their work efficiency.





8 hours




6800mAh



recycled



Product features

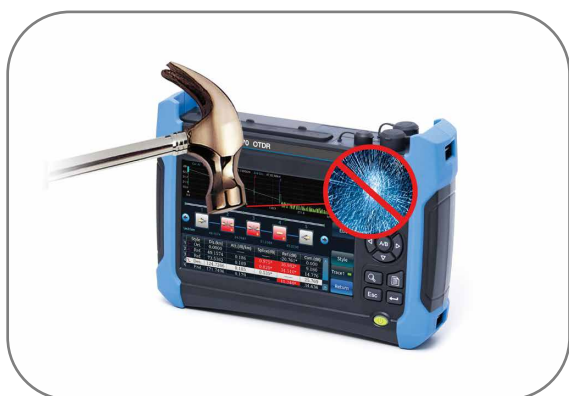

Shock resistant



Water resistant



Drop resistant



Dust resistant

PRODUCT SPECIFICATION:

Model	QX70-S	QX70-P	QX70-MS
Wavelength Dynamic Range	1310/1550nm 32/30dB	1310/1550/1625nm 32/30/28dB	850/1300+1310/1550nm 24/28dB 32/30dB
Event dead zone(m)	0.5		
Attenuation dead zone(m)	3		
Ranging accuracy	$\pm(0.75 + \text{sample interval} + 0.0025\% \times \text{range})$ (excluding the refractivity placement error) (m)		
Ranging resolution	0.05, 0.1, 0.2, 0.5, 1, 2, 4, 8, 16 and 32m		
Test range	0.4, 0.8, 1.6, 3.2, 6.4, 16, 32, 64, 128, 256 and 512km (mono-mode); 0.4, 0.8, 1.6, 3.2, 6.4, 16 and 32km (850nm multi-mode)		
Testing PW	3, 5, 10, 30, 80, 160, 320, 640, 1280, 5120, 10240 and 20480ns 3, 5, 10, 30, 80, 160, 320, 640 and 1280ns(850nm multi-mode)		
Maximum number of sampling points	256k		
Loss resolution	0.001dB		
Refractivity setting range	1.00000 ~ 1.99999(step: 0.00001)		
Range unit	km, m, thousand feet, feet		
Display	800×480, 7-inch TFT color LCD (a capacitive touch screen in the standard configuration, and a resistive touch screen optional)		
Optical output interface	FC/UPC (standard configuration, with LC/UPC, SC/UPC and ST/UPC optional)		
Interface language	Simplified Chinese, English, Russian and Korean available (contact the office for other language support)		
External interfaces	USB, Micro-USB, 10M/100M Ethernet, earphone and Micro SD		
Power supply	AC/DC adapter: AC100V~240V, 50/60Hz and 1.5A DC: 17V±3V(2A) Internal Li battery: 11.1V, 6800mAh, battery operating time: 8h		
Built-in Power Meter	-70~+10dBm		
Built-in Visual Fault Locator	650nm / 10mW		
Weight/Dimensions	About 1.8kg / 52mm(W)×180mm (H)×55mm (D)		
Environmental adaptability	Operating temperature: -10°C~+50°C (battery charging: 5°C~40°C) Storage temperature: -40°C~+70°C (battery: -20°C~60°C) RH: 5% ~95%, no condensation		

CONFIGURATION LIST:



HEAD OFFICE

KomShine Technologies Limited

CONTACT US

Add: 2F Bldg. D Qinheng Tech. Pk. Nanjing, JS, 210001, China

TEL: +86 (025) 66047688

www.komshine.com

ventas@komshine.com

* Komshine reserves the right to improve, enhance, or modify the features and specifications of KomShine products without prior notification.

*Company and product names appearing in this catalogue are registered marks or trademarks of respective companies.

* This catalogue is printed using environmentally friendly paper and ink.